



TRUECHARGE2 BATTERY CHARGER DATASHEET



AVAILABLE IN:
10A/12V

ULTRA-COMPACT, HIGH PERFORMANCE CHARGER FOR WORLDWIDE CHARGING

TRUEcharge2 Battery Chargers lead the industry with a small footprint and ultra-compact design. Designed for marine and commercial applications worldwide, the TRUEcharge2 10-amp replaces the former best-selling, first-generation TRUEcharge 10TB unit and features universal auto ranging input voltage (90 Vac–265 Vac, 47–63 Hz), which can be used in most parts of the world. The TRUEcharge2 10-amp is smaller and lighter than its predecessor and can be mounted in a variety of positions.

The TRUEcharge2 10-amp charger uses power factor correction to deliver a full three-stage charge cycle. As a result, the charger requires less incoming AC power to operate at its peak efficiency, freeing up more usable AC power for onboard electronics.



Automatic 3-stage Battery Charger



DC to AC Power Inverting



Included Battery Temperature Sensor



Circuit Breaker Protection


APPLICATIONS:




www.xantrex.com

CUSTOMER CARE: 1.800.670.0707

Copyright © 2021 Xantrex LLC. All Rights Reserved. All trademarks are owned by Xantrex LLC.
V2. 11.23.2021

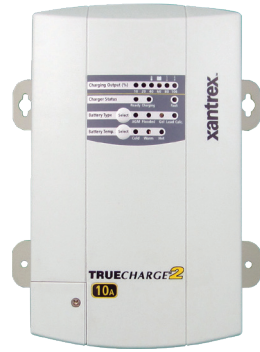

FRONT VIEW

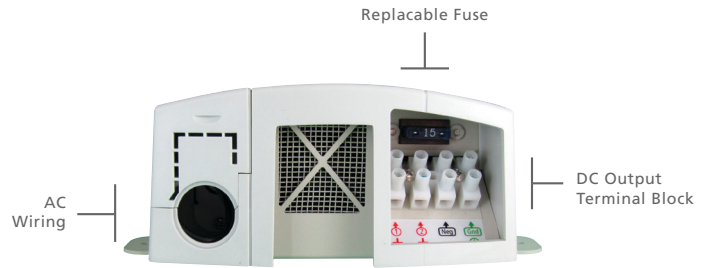

BOTTOM VIEW

PRODUCT FEATURES

- Microprocessor-controlled, multistage charging algorithms
- Charges flooded, gel, AGM and lead-calcium batteries
- Power factor corrected, temperature-compensated charging
- Mounting is possible in a variety of orientations and in areas where space is limited
- Easy access to AC and DC wiring from one side
- Tested to conform to ingress protection rating IP32 and meets UL1564, UL1236 including marine supplement and ABYC standards

PROTECTION FEATURES

- Reverse battery polarity protection
- Drip-proof design
- Over temperature protection
- DC over-voltage protection
- Battery overcharging protection

THREE-STAGE PROTECTION

Multistage charging ensures batteries receive optimum charging, but with minimal wear and tear, regulating the voltage and current delivered to the batteries in three automatic stages:

- Bulk: Replaces 70–80% of the battery's state-of-charge at the fastest possible rate
- Absorption: Replenishes the remaining 20–30% of charge, bringing the battery to a full charge at a slow, safe rate
- Float: Voltage is reduced and held constant in order to prevent damage and maintain batteries at a full charge the remaining 20–30% of charge, bringing the battery to a full charge at a slow, safe rate

POWER FACTOR CORRECTED (PFC) CHARGING

Less shorepower is required for charging batteries, freeing up more usable AC power for running electrical devices and appliances and reducing the likelihood of tripping shorepower breakers

TRUECHARGE2 BATTERY CHARGER DIMENSIONS



ELECTRICAL SPECIFICATIONS (@ 25°C unless otherwise noted)

	TRUEcharge2 10
Output Current (nominal)	10A
Output Voltage (nominal, depending on settings)	
Charge	14.2 – 15.5Vdc
Float	13.4 – 13.8Vdc
Equalize	N/A
DC Output Connections	Two
AC Input Voltage	90 – 265Vac; 47 – 63Hz 120Vac, 230Vac, 240Vac nominal
Temperature Compensation	Three settings
Charger Efficiency	> 80%
Battery Type	Gel, Flooded, AGM, Pb-Ca
Minimum Recommended Battery Bank Size	20Ah

GENERAL SPECIFICATIONS

	TRUEcharge2 10
Operating Temperature Range*	32°F – 149°F (0°C – 65°C)
Storage Temperature	-40°F – 176°F (-40°C – 80°C)
Battery Connection	Two positive terminals One negative terminal
Dimensions (H x W x L)	2.7 x 5.4 x 8.8" (70 x 138 x 224mm)
Weight	3.3lb (1.5kg)
Part Number	804-1210

REGULATORY APPROVALS

CSA E60335-2-29, UL1564, and UL1236 including the Marine Supplement and drip test. CE Marked for the Low Voltage Directive (safety) and the EMC Directive. Complies with IEC 60335-2-29 including Australian deviations. Ingress protection rating IP32 per EN/IEC 60529. Complies with FCC Part 15B and Industry Canada ICES-003 Class B emissions limits. Complies with ABYC A-31

Specifications are subject to change without notice.
*Output may derate above 50°C

CONTACT**CUSTOMER SERVICE**

1.800.670.0707
customerservice@xantrex.com
Hours of operation:
6:30am - 4:30pm PST, Monday to Friday

 facebook.com/Xantrex

 @Xantrex

 youtube.com/XantrexTechnology

LEARN MORE ON:

www.xantrex.com