

xantrex™

FREEDOM X 2000 230V DATASHEET



AVAILABLE IN:
2000W, 12V

ROBUST. DURABLE. FLEXIBLE.

The FREEDOM X inverter offers premium performance in a lightweight compact package. It cranks out full output in invert mode from -20°C - 40°C for operation in all climate temperatures. The extended surge rating of the Freedom X makes it ideal to start difficult loads including a fridge and microwave. The quick connect terminals at AC IN/OUT make installation a breeze.



Exceptional full rated performance in all climate temperatures



True sine wave output for sensitive and motor loads



Ignition control feature turns inverter on/off via 12Vdc signal



View, control and configure via Bluetooth app* on iOS and Android (COMING SOON)

APPLICATIONS:



**2 YEAR
WARRANTY**

www.xantrex.com
CUSTOMER CARE: 1.800.670.0707

Copyright © 2020 Xantrex LLC. All Rights Reserved. All trademarks are owned by Xantrex LLC.


*requires FREEDOM X Bluetooth Remote Panel, part #808-0817-02

¹ CE Marking: Low Voltage Directive, EMC Directive, and RoHS Directive Compliant

² Automotive EMC Regulation - 10 R-06 Compliant



TOP VIEW

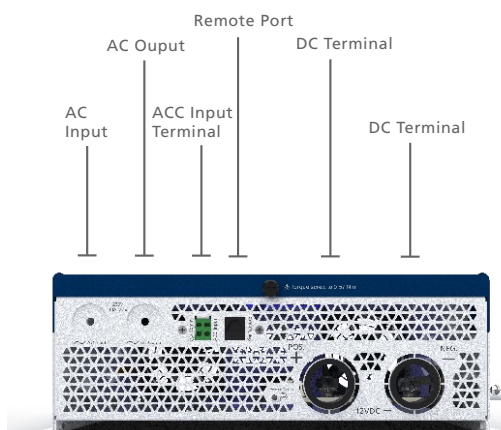

SIDE VIEW



SIDE VIEW

INVERTER FEATURES

Extended Surge Rating

- Surges to 2X continuous power for at least 2 seconds for motor loads

True Sine Wave AC Power

- For operation of sensitive and motor loads

Ignition Control

- Feature to turn inverter on/off via a 12 VDC signal and to minimize battery drain by switching the inverter off when the ignition key is turned off

Wide 10-17 VDC Input Range

- Ensures inverter operation on high voltage alternators found on many new vehicle chassis

Programmable AC Under-Voltage (170-220V~) Shutdown

- Feature ideal to operate under weak shore power or generator input

Built in 30A AC Transfer Relay (3KW model)

- Senses when outside AC Power is present and transfers the load from the inverter to the source of incoming power

COMING SOON

FREEDOM X BLUETOOTH REMOTE PANEL + XANTREX APP



FREEDOM X BLUETOOTH REMOTE PANEL
(808-0817-02)



- Easily monitor system status
- Monitor alerts
- Change settings conveniently
- Connect via bluetooth
- Available on Android and iOS



DOWNLOAD ON



CONNECT WITH Bluetooth

ELECTRICAL SPECS - INVERTER

	FREEDOM X 2000 230V
AC Output Operating Voltage Options	220/230/240V $\sim$
Continuous Output Power	Continuous Power 2000 W @40°C True sine wave (TSW)
Continuous AC Output Current	8.3 A $\sim$
Surge Power	4000 W (> 2 sec)
Frequency (Configurable)	50 Hz (or 60 Hz)
DC Input Operating voltage range	10.0 - 17.0 V ---
DC Input Max Non-Operating Voltage	25.2 V ---
DC Input Nominal Voltage (inverting)	12.0 V ---
DC Nominal Current at Full Load	192 A ---
Peak Efficiency	91%
Full Load Efficiency	> 87.5%


GENERAL SPECS

	FREEDOM X 2000 230V
Operating Temperature Range	-20 to 60 °C, with output derated above 40 °C
Storage Temperature Range	-40 to 70 °C
Operating Humidity Range	5 to 95% RH, non-condensing
Operating Input AC Pass-Through Voltage Range	170-280V $\sim$
Safe Non-Operating Input AC Voltage Range	Up to 300V $\sim$
Transfer Relay AC Current Rating	30 A $\sim$, 24 A continuous
Part Number	817-2000-12
L x W x H (without flanges)	370 mm x 275 mm x 100 mm
L x W x H (with flanges)	370 mm x 305 mm x 100 mm
Net Weight	7.2 kgs

REGULATORY APPROVALS

	FREEDOM X 2000 230V
Safety	CE Marking, Low Voltage Directive Compliant (Marine installations, drip shield, 808-1050)
EMC	CE Marking, EMC Directive and Automotive EMC - Regulation 10 R-06 Compliant
Environmental	CE Marking, RoHS Directive Compliant

FREEDOM X 2000 230V DIMENSIONS

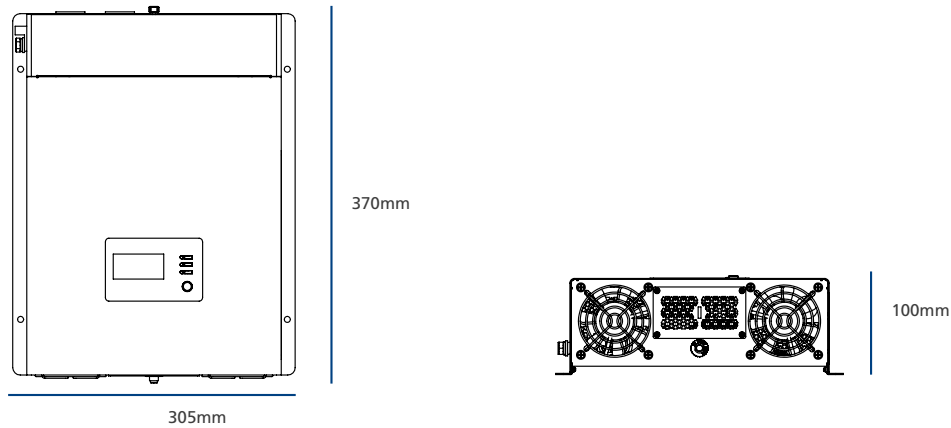


ACCESSORIES

Mfg Part #	Description
808-0817-01	FREEDOM X/XC Remote Panel (with 7.62m network cable)
808-0817-02	FREEDOM X Bluetooth Remote Panel (with 7.62m network cable) (Coming Soon)
31-6257-00 (7.62m), 31-6262-00 (15.24m)	Remote Panel Cable
808-0232-01	Battery Temperature Sensor (BTS)
808-1050	Drip Shield (for marine use)



ACC input terminal for connecting ignition control wiring. Remote port allows you to connect an accessory remote control or display device.

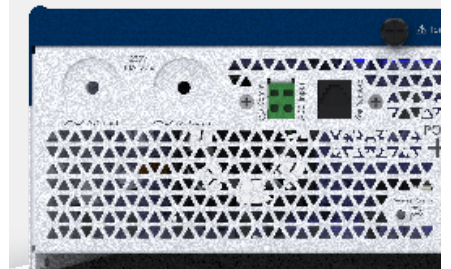

CONTACT

CUSTOMER SERVICE

1.800.670.0707
customerservice@xantrex.com
Hours of operation:
6:30am - 4:30pm PST, Monday to Friday

 facebook.com/Xantrex

 @Xantrex

 youtube.com/XantrexTechnology

LEARN MORE ON:

www.xantrex.com